

TECHNICAL DATA / DATOS TÉCNICOS

AMBIENT CONDITIONS / CONDICIONES AMBIENTALES

Ambient temperature - Temperatura ambiente	0°C ... +40°C
--	---------------

LIGHTING DATA / DATOS LUMÍNICOS


Colour temperature - Temperatura de color	5.500K
---	--------

MATERIAL REQUIRED FOR INSTALLATION / MATERIAL REQUERIDO PARA LA INSTALACIÓN

Cable gland - Prensaestopas	PG-11	Included
Clamps - Bridas		Optional - see Accessories p.

MECHANICAL DATA / DATOS CONSTRUCTIVOS

Tube - Tubo	B-Color
-------------	---------


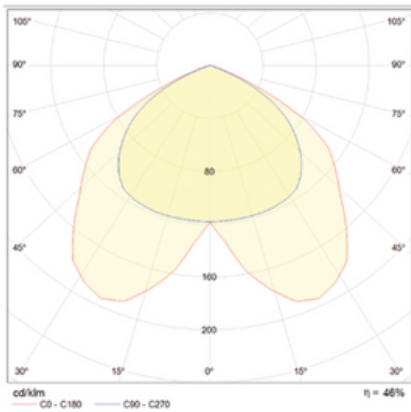


MAINTAINED
PERMANENTE ●

NON-MAINTAINED
NO PERMANENTE ●

PERMANENT MODE SWITCHED
MODO PERMANENTE ON/OFF ●

Ref.	(Lm)	Batt.	Maintained/ N	L (mm)	D (mm)
Q0303	100	1,5H	●	415	81
Q0311	100	3H	●	415	81
Q0304	100	1,5H	●	415	81
Q0312	100	3H	●	415	81
Q0314	100	1,5H	●	415	81
Q0315	100	3H	●	415	81
Q0305	200	1H	●	415	81
Q0306	200	1H	●	415	81
Q0316	200	1H	●	415	81
Q0307	300	1H	●	415	81
Q0308	300	1H	●	415	81
Q0317	300	1H	●	415	81

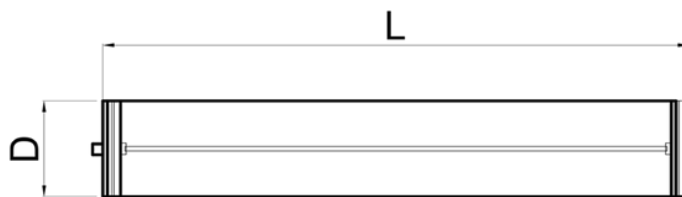

OPTIONAL ACCESSORIES / ACCESORIOS OPCIONALES

DESCRIPTION	Ref.	
Zinc plated steel clamps - Bridas acero cincado (1)	Q0338	2 pcs
Stainless steel clamps - Bridas acero inoxidable (1)	Q0347	2 pcs
Quick opening stainless steel clamps - Bridas acero inoxidable de apertura rápida (2)	Q0348	2 pcs
Anti vandalic PC clamp - Bridas PC anti vandállicas (3)	Q0334	2 pcs
ABS clamps - Bridas ABS (4)	EX623	2 pcs
Steel cable suspension - Suspensión cable de acero	Q0349	1900mm 2 pcs
Pole fixing - Fijación a báculo	Q0978	∅ 60 mm
Exit sign - Señal de salida	Q0310 ↓	20m. visibility - visibilidad 20m