




UNIQUE IN THE MARKET WITH INTEGRATED EMERGENCY OPTION  
**ÚNICO EN EL MERCADO CON OPCIÓN DE EMERGENCIA INTEGRADA**



## TECHNICAL DATA / DATOS TÉCNICOS

### EXPLOSION PROTECTION / PROTECCIÓN CONTRA EXPLOSIONES

Zones	1,21,2,22		
Gas explosion protection	ATEX: II 2G Ex db IIB T6... T5 Gb	IECEX: Ex db IIB T6... T5 Gb	
Dust explosion protection	ATEX: II 2D Ex tb IIIC 85°C Db	IECEX: Ex tb IIIC 85°C Db	

### AMBIENT CONDITIONS / CONDICIONES AMBIENTALES

Ambient temperature - Temperatura ambiente (-20°C ... +60°C) = **T5** (-20°C ... +55°C) = **T6** (-20°C ... +30°C) = **T6 Emergency**

### LIGHTING DATA / DATOS LUMÍNICOS

Efficiency - Eficiencia (Lm/W)	±150m/W		
Colour temperature - Temperatura de color	(Optional range 4.000K—5.000K)		


### MATERIAL REQUIRED FOR INSTALLATION / MATERIAL REQUERIDO PARA LA INSTALACIÓN

Armored cable gland - Prensaestopas de cable armado	M20	Optional. See accessories
Tip support - Lira de soporte	Stainless steel - Acero Inoxidable	Included

### MECHANICAL DATA / DATOS CONSTRUCTIVOS

Diffuser - Difusor	8mm. tempered glass diffuser - Vidrio templado de 8mm	
--------------------	---	--


● EXTENSIVE 150°






● ASYMMETRIC



● INTENSIVE 65°



Ref.	Equiv.(HM)	(W)	(Lm)	(°K)	N° parts	Optic	DALI supl.	Emerg. supl. (3h 400lm)	Emerg. supl. (3h 1000lm)
PA604A	150W	60	8.766	4.000	1	●	MUSDA1	OEMP1	-
PA604B	150W	60	8.766	4.000	1	●	MUSDA1	OEMP1	-
PA604C	150W	60	8.766	4.000	1	●	MUSDA1	OEMP1	-
PA704A	250W	120	17.533	4.000	2	●	MUSDA2	OEMP2	OEMP3
PA704B	250W	120	17.533	4.000	2	●	MUSDA2	OEMP2	OEMP3
PA704C	250W	120	17.533	4.000	2	●	MUSDA2	OEMP2	OEMP3
PA804A	400W	179	26.299	4.000	3	●	MUSDA3	OEMP2	OEMP3
PA804B	400W	179	26.299	4.000	3	●	MUSDA3	OEMP2	OEMP3
PA804C	400W	179	26.299	4.000	3	●	MUSDA3	OEMP2	OEMP3
PA605A	150W	60	8.878	5.000	1	●	MUSDA1	OEMP1	OEMP3
PA605B	150W	60	8.878	5.000	1	●	MUSDA1	OEMP1	OEMP3
PA605C	150W	60	8.878	5.000	1	●	MUSDA1	OEMP1	OEMP3
PA705A	250W	120	17.755	5.000	2	●	MUSDA2	OEMP2	OEMP3
PA705B	250W	120	17.755	5.000	2	●	MUSDA2	OEMP2	OEMP3
PA705C	250W	120	17.755	5.000	2	●	MUSDA2	OEMP2	OEMP3
PA805A	400W	179	26.633	5.000	3	●	MUSDA3	OEMP2	OEMP3
PA805B	400W	179	26.633	5.000	3	●	MUSDA3	OEMP2	OEMP3
PA805C	400W	179	26.633	5.000	3	●	MUSDA3	OEMP2	OEMP3

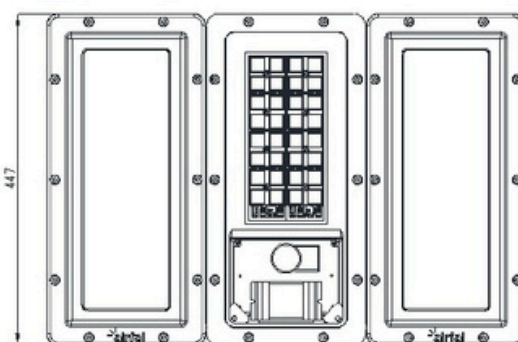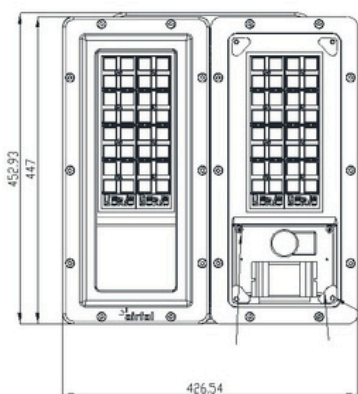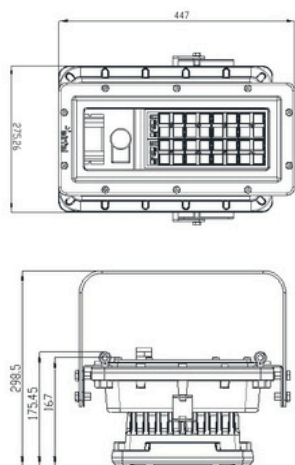

## OPTIONAL ACCESSORIES / ACCESORIOS OPCIONALES

DESCRIPTION	Ref.	
Galvanised steel cable suspensión kit - Kit de suspensión cable de acero	MUSUSG	3m   4 pcs
Stainless steel cable suspensión kit - Kit de suspensión cable de acero inox	MUSUSI	3m   4 pcs
Armored cable gland - Prensaestopas cable armado	MUSPA	M20
Emergency - Emergencia 3h 400lm	See chart (Emerg. sup 3H 400lm) ↑	
Emergency - Emergencia 3h 1000lm	See chart (Emerg. sup 3h 1000lm) ↑	
Dali option - Opción DALI	See chart (DALI sup.) ↑	